


MERSEN
Expertise, our source of energy

BRANCH CIRCUIT
PROTECTION

FUSED
COORDINATION
PANELBOARD

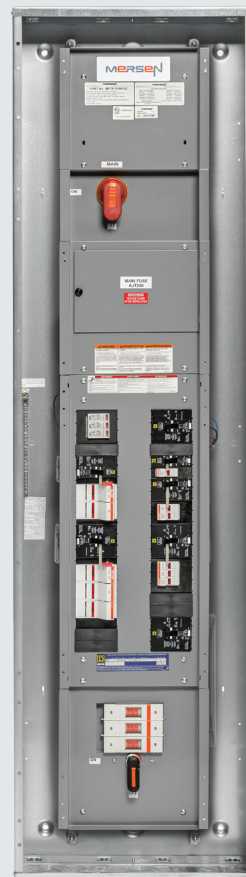

SELECTIVE COORDINATION WITH MERSEN'S FUSED COORDINATION PANELBOARD

Selective Coordination is required in several locations as defined in the National Electrical Code® (NEC). Mersen's Fused Coordination Panelboard (MFCP) can simplify the process in achieving code compliance for designers. These panels are provided with a default short circuit current rating (SCCR) of 200kA and provide overcurrent protection through a combination of a circuit breaker and a fuse. The circuit breaker is designed to operate on overloads up to 2 times their rating and the fuse will operate for faults over that value, and up to 200kA.



Achieving selective coordination typically requires a costly short circuit current study. However, with the Mersen Fused Coordination Panelboard, coordination can easily be determined with upstream Mersen fuses. The MFCP utilizes Amp-Trap 2000® ATDR and AJT fuses for branch circuits. Simply maintain a 2:1 ratio with upstream Amp-Trap 2000 fuses and the system will coordinate. Many circuit breakers will coordinate easily with downstream fuses.

A system that is selectively coordinated will ensure that any fault condition is localized to the nearest overcurrent protective device. This increases system reliability and decreases downtime. Selective coordination is desired for all systems but is also mandatory per NEC for critical circuits:

- 620.62 - Elevator Circuits
- 700.27 - Emergency Systems
- 701.18 - Legally Required Standby Systems

By localizing a fault to the nearest overcurrent device, selective coordination prevents unnecessary disconnection from other circuits in the system. An electrical system that utilizes Mersen fuses can be selectively coordinated simply by meeting the minimum fuse rating ratios. By adhering to the minimum fuse ratios, engineers and installers can save time and money because no complex coordination study is required.

FEATURE	BENEFIT
UL 67 Listed panelboard with a default short-circuit current rating of 200kA	Easily comply with NEC 110.10 as most systems will be below 200kA
Combination rated circuit breaker and fuse for branch circuit protection	Fuses will open only on short-circuits—Circuit Breaker can easily be reset on common overloads
Class CC and Class J fuses for Branch short-circuit protection	Standard fuse classes that are commonly stocked by distributors
Maximum of 3 fuse sizes	Typically already in inventory
Selective Coordination with upstream fuses when ratios are maintained	Simple selective coordination without short-circuit current study—Meets requirements of NEC
Finger-safe fuse holders	No exposed live components for increased safety
Interlocked branch circuit fuseholder and circuit breaker	Ensures that the fuse is disconnected before removal
Standard 20 inch wide panel	Meets existing space requirements of other commercially available panelboards
<ul style="list-style-type: none"> • Surface & flush mount • Up to 42 branch circuits • NEMA 1, 12 and 3R • Feed-Through lugs • Surge Protection • MLO, Main Switch (with or without fuses) • Service entrance rated 	Increased flexible options to meet specific application requirements
Visible blades on main disconnect without removing covers	Visual verification of disconnect operation
Cover interlocked with main disconnect	Ensures that power is disconnected before cover can be removed
UL listed up to 600VAC	Meets most common North American voltages
Main lug only, non-fused main disconnect or fused main disconnect up to 400A	Provides designers with options
Standard open fuse indication	Easy identification of open branch fuses
Optional integral surge protection	Easily provide surge protection for critical branch circuits

SURGE PROTECTION

In 2014, NEC added article 700.8 which requires that a surge protective device must be installed in or on all new emergency system panelboards. NEC defines emergency systems as legally required systems intended to automatically supply illumination, power and systems essential for safety to human life. The MFCP helps easily meet this requirement with the optional built-in Surge-Trap® pluggable SPD. Surge-Trap utilizes Mersen's fail-safe TPMOV® technology.




ORDERING DETAILS

The Mersen Fused Coordination Panelboard is a highly configurable panelboard with many options. Please contact Mersen Technical Services at 978-465-4853 or fusedpanelboards.EP@mersen.com for submittal and bid packages.

HIGHLIGHTS AND DIMENSIONS

BRANCH CIRCUIT PROTECTION

Circuit breaker provides resettable overload protection for low level faults. Includes ratings from 15A to 100A in 1,2 or 3 pole options

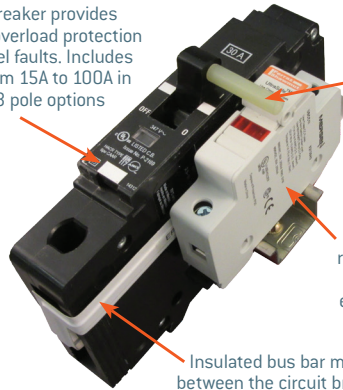

Mechanically interlocked to ensure the fuse holder is not opened while power is on

When a high current event does occur, the MFCP utilizes only 3 readily available fuse ratings in branch circuit devices, making it easy to source or stock replacement fuses.

Insulated bus bar makes the connection between the circuit breaker and fuse holder

Overloads are the most common overcurrent condition and the MFCP's innovative combination branch circuit protection provides resettable overload protection up to 2 times the circuit rating while still providing true class CC and J protection for your critical loads on high current faults. MFCP branch circuit protection devices can be ordered to replace or add new branch circuits within a panel.

MFCP BRANCH PROTECTION PART NUMBERS				
PART NUMBER*		POLES	CURRENT RATING	FUSE (INCLUDED)
LEFT SIDE OF PANEL	RIGHT SIDE OF PANEL			
MFCP-15-1-L	MFCP-15-1-R	1	15A	ATDR30
MFCP-15-2-L	MFCP-15-2-R	2		
MFCP-15-3-L	MFCP-15-3-R	3		
MFCP-20-1-L	MFCP-20-1-R	1	20A	
MFCP-20-2-L	MFCP-20-2-R	2		
MFCP-20-3-L	MFCP-20-3-R	3		
MFCP-25-1-L	MFCP-25-1-R	1	25A	
MFCP-25-2-L	MFCP-25-2-R	2		
MFCP-25-3-L	MFCP-25-3-R	3		
MFCP-30-1-L	MFCP-30-1-R	1	30A	
MFCP-30-2-L	MFCP-30-2-R	2		
MFCP-30-3-L	MFCP-30-3-R	3		
MFCP-35-1-L	MFCP-35-1-R	1	35A	AJT60
MFCP-35-2-L	MFCP-35-2-R	2		
MFCP-35-3-L	MFCP-35-3-R	3		
MFCP-40-1-L	MFCP-40-1-R	1	40A	
MFCP-40-2-L	MFCP-40-2-R	2		
MFCP-40-3-L	MFCP-40-3-R	3		
MFCP-50-1-L	MFCP-50-1-R	1	50A	
MFCP-50-2-L	MFCP-50-2-R	2		
MFCP-50-3-L	MFCP-50-3-R	3		
MFCP-60-1-L	MFCP-60-1-R	1	60A	
MFCP-60-2-L	MFCP-60-2-R	2		
MFCP-60-3-L	MFCP-60-3-R	3		

* MFCP branch protection devices are built to be installed on one side of the panel or the other.

Please contact factory for 100A branch circuits.

STANDARD PANEL HIGHLIGHTS

- Easy selectivity ratios with upstream fuses
- Voltage: 120/208, 120/240, 277/480, 347/600
- Main Bus: 250A or 400A
- Main Disconnect: MLO, Fused Main or Non-Fused Main
- SCCR: 200kA
- Surge Protection (SPD) optional
- Up to 42 branch circuits per panel
- Standard 20" wide
- Feed through lugs optional
- Surface mount
- Uses commonly available class CC & J fuses

MAIN

- Up to 400A Fused Main Disconnect
- Allows for panel isolation
- Lockout provision
- Visible contacts
- Interlocked with cover

AJT AMP-TRAP 2000[®] FUSES - MAIN FUSE

- Time Delay
- 2:1 coordination ratio
- 600VAC interrupting rating 200kA

BRANCH CIRCUITS

- Circuit breaker opens overloads up to 2 times circuit rating
- ATDR, AJT fuses open short circuit currents
- Fuseholder interlocked to prevent opening while energized
- Circuits up through 100A 1, 2 & 3 pole
- True Class J and CC protection

DIMENSIONS


Standard NEMA 1 Enclosures

Width = 20 inches Depth = 6 inches

Height varies depending on number of circuits and main options.

NEMA 1 ENCLOSURE SPECIFICATIONS

- **Tab:** Galvanized unpainted steel. One endwall is provided with knockouts, and the other endwall is blank.
- **Door:** Equipped directory card, flush mount lock
- **Trim and Door Finish:** ANSI 49 grey baked enamel electrodeposited over cleaned, phosphatized steel

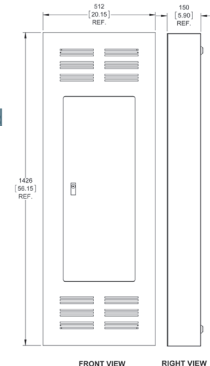



MERSEN IS A GLOBAL EXPERT
IN ELECTRICAL POWER AND
ADVANCED MATERIALS

NORTH AMERICA

USA
Mersen USA
374 Merrimac Street
Newburyport, MA 01950
T : 978 462 6662

CANADA
Mersen Canada
6200 Kestrel Road
Mississauga, ON L5T 1Z1
T : 416 252 9371

EUROPE

FRANCE
Mersen France SB S.A.S.
15 rue Jacques de Vaucanson
F-69720 Saint-Bonnet-de-Mure
T : +33 4 72 22 66 11

ASIA

CHINA
Mersen Shanghai
No.55-A6. Shu Shan Road
Songjiang 201611 Shanghai
T : +8621 67602388



EP.MERSEN.COM