

# STXR Series

Surge-Trap®

## SURGE PROTECTIVE DEVICE

NEMA DEVICES FOR ANSI/UL 1449  
TYPE 1 AND 2 APPLICATIONS



The most popular range in the STX series offering, the Surge-Trap® Type 1 STXR meets requirements for UL1449 5th Edition and is ideal for the replacement of obsolete surge arrestors. The STXR Series SPDs feature TPMOV® technology inside, making them the safest product available. With a small, compact design and line or load installation flexibility, the STXR series is the perfect fit for branch panel and/or individual equipment protection.

## FEATURES AND BENEFITS:

- Designed with the industry-leading Mersen TPMOV® Technology
- LED status indicator (ON = Good, OFF = Replace)
- NEMA 4X enclosure for outdoor or indoor use
- Fits 3/4" knockouts with 3' leads for easy installation
- Optional mounting bracket for surface mount applications
- Optional audible alarm and remote dry contacts
- For use in ANSI/UL Type 1 or 2 SPD installations
- Up to 10 modes of Protection (L-N, L-L, L-G optional, N-G optional)
- 5-year warranty




## RATINGS:

- **Volts ( $U_n$ ):** 120-600VAC
- **Nominal Discharge Current Rating ( $I_n$ ):** 10-20kA
- **Surge Capacity (per phase and per mode):** 50kA
- **Short-Circuit Current Rating (SCCR):** 200kA

## APPROVALS:

- ANSI/UL 1449 5th Edition, Type 1 SPD, File E210793
- CSA C22.2, Type 1 SPD
- ANSI/IEEE C62.41.1, C62.41.2, C62.45
- UL96A Lightning Protection
- RoHS Compliant

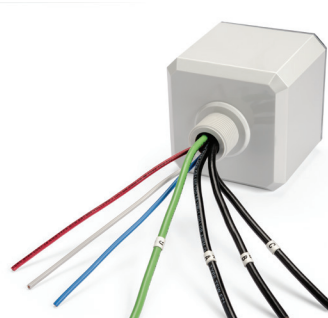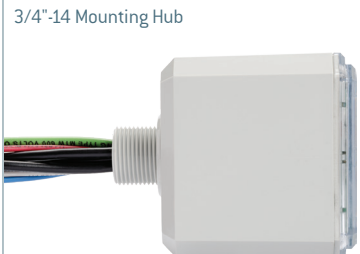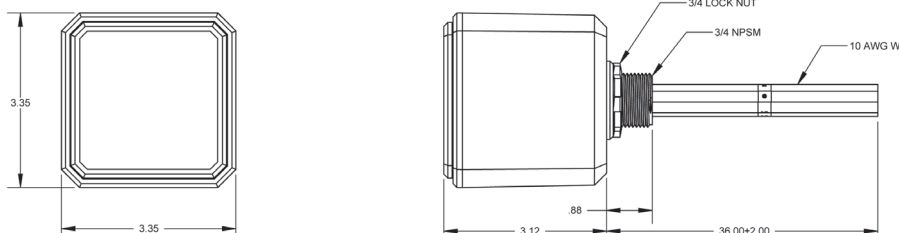

General Product Specifications										
Mounting:	3/4" – 14 threaded hub Includes locking washer Pre-wired 3' (1m) 10AWG			Relative Humidity Range:	0 to 95% non-condensing					
Wiring:	NEMA 4X Non-metallic			Visual End-of-Life Indicator:	GREEN = OK, OUT = REPLACE					
Enclosure:	UL94-5VA			Frequency:	50-60Hz					
Flammability:	-40°C to +85°C									
Operating & Storage Temperature:										
Catalog Number (includes suffixes*)	System Voltage and Configuration	I <sub>n</sub>	Maximum Continuous Operating Voltage (MCOV, U <sub>c</sub> )				Voltage Protection Rating (VPR) (UL 1449, 6kV, 3kA)			
			L-N	L-G	L-L	N-G*	L-N	L-G	L-L	N-G*
STXR120P05	120V Single Phase	20kA	150	300	-	150	700	1200	-	600
STXR240P05	240V Single Phase	20kA	320	640	-	320	1200	1800	-	1000
STXR240S05	240/120V Split Phase	20kA	150	300	300	150	700	1200	1200	600
STXR480S05	480/240V Split Phase	20kA	320	640	640	320	1200	1800	2000	1000
STXR208Y05	208/120V 3-Phase WYE	20kA	150	300	300	150	700	1200	1200	600
STXR380Y05	380/220V 3-Phase WYE	20kA	320	640	640	320	1200	1800	2000	1000
STXR480Y05	480/277V 3-Phase WYE	20kA	320	470	640	150	1200	1800	2000	700
STXR600Y05	600/347V 3-Phase WYE	20kA	420	690	840	270	1500	2500	2500	1000
STXR240D05	240V 3-Phase DELTA	20kA	-	320	640	-	-	1200	2000	-
STXR480D05	480V 3-Phase DELTA & HRG WYE	10kA	-	550	1100	-	-	1800	3000	-
STXR600D05	600V 3-Phase DELTA	20kA	-	690	840	-	-	2000	2500	-
			L-N/ HL-N	L-G/ HL-G	L-L/ HL-L	N-G*	L-N/ HL-N	L-G/ HL-G	L-L/ HL-L	N-G*
STXR240H05	240/120V Hi-Leg DELTA	20kA	150/270	300/420	300/420	150	700/1.2k	1.2k/1.2k	2k/2k	600
STXR480H05	480/240V Hi-Leg DELTA	10kA	320/550	320/550	640/870	320	1.2/1.8k	1.2/1.8k	2k/2.5k	1000
*Available Options:	Add Suffix "N" at the end of the part number for N-G protection. Example: STXR208Y05N. N-G protection is suggested downstream of N-G bond, when the unit is installed > 10' (3m) from service entrance or transformer. Without "N" option for installation of SPD at or near service entrance or transformer < 10' (3m) (N-G Bonded does not require N-G protection). Add Suffix "A" at the end of the part number for Audible Alarm and Dry Contact. Example: STXR208Y05A For both options, add the suffix "AN" at the end of the part number. Example: STXR208Y05AN									
Catalog Number	Accessory Description									
STXRMBK	STXR Mounting Bracket Kit. Includes (1) 90 degree bracket and (2) mounting screws									
Optional Form C Dry Contact and Audible Alarm (Suffix "A")										
<b>Form C Dry Contact</b> (Pre-wired 3' 18AWG) 125VAC, 1A Resistive 30VDC, 2A General Purpose  Red = Normally Closed Gray = Common Blue = Normally Open			<b>Audible Alarm</b> Alarm sounds when any protection is lost							
Dimensions and Mounting Configurations							Bracket Mount Option 