

Protistor® size 2x122 aR

2000VDC

HALBLEITERSCHUTZSICHERUNGEN

SUPERFLINKE SICHERUNGSEINSÄTZE FÜR GLEICHSTROM IM QUADRATISCHEN KÖRPER



Mersen DC offers provide a very high performant protection for railway power and auxiliary circuits. Mersen DC Semiconductor fuse-links were developed to provide improved performance required by today's new DC equipment. These fuse-links are typically operated at more elevated temperature than other fuse type, have lower I^2t to minimize damage to protected components on short circuits, lower watts loss and longer life.

TECHNISCHE DATEN ÜBERBLICK

Bemessungsbetriebsspannung DC	2000 VDC
Bemessungsstrom (A)	500 ... 800 A
Betriebsklasse/Charakteristik	aR
Baugröße	2x122
Verpackungseinheit	1
Gewicht	3,35 kg

PRODUKTVORTEILE

- Extremely fast acting
- Extremely current limiting
- Very low I^2t
- Worldwide acceptability
- Superior cycling ability

ANWENDUNGSBEREICHE

- Protection of inverters
- Protection of motor drives
- Protection of UPS systems
- Protection of similar 2000V or less equipments
- Railway power and auxiliary circuits

TECHNISCHE NORMEN

- IEC 60269-4 compliance

Mersen products have been designed by Mersen for a range of specific applications to be operated depending on particular specification and conditions. Mersen makes no representation or/and warranty, and waives any liability, either express or implied for products' reliability and life time or technical performance in case Mersen has not been provided with customer's specifications or if the products are not purchased directly from Mersen or its distributors and/or agents.


PRODUKTPALETTE

Size 2x122 SR 2000VDC

Katalognummer	Teilenummer	Bemesungsspannung DC (IEC)	Bemesungsstrom I_n	Bemesungsaus-schaltvermögen DC	Max. total I^2t @1600V for L/R=15ms	Max. total I^2t @1600V for L/R=45ms	Bemesungsleistungsabgabe bei I_n	Bemesungsleistungsabgabe bei 0.8 I_n	Ausschaltwert I^2t bei Bemesungsspannung	Verpackungseinheit	Gewicht
D2122SD20C500QF	E076640	2000 V	500 A	100 kA	200000 A ² s	348000 A ² s	274 W	145 W	200000 A ² s	1	3,35 kg
D2122SD20C630QF	F076641	2000 V	630 A	100 kA	468000 A ² s	800000 A ² s	314 W	155 W	468000 A ² s	1	3,35 kg
D2122SD20C800QF	V096066	2000 V	800 A	100 kA	876000 A ² s	1520000 A ² s	367 W	182 W	876000 A ² s	1	3,35 kg


Mersen products have been designed by Mersen for a range of specific applications to be operated depending on particular specification and conditions. Mersen makes no representation or/and warranty, and waives any liability, either express or implied for products' reliability and life time or technical performance in case Mersen has not been provided with customer's specifications or if the products are not purchased directly from Mersen or its distributors and/or agents.

ZEIT-STROM KENNLINIEN

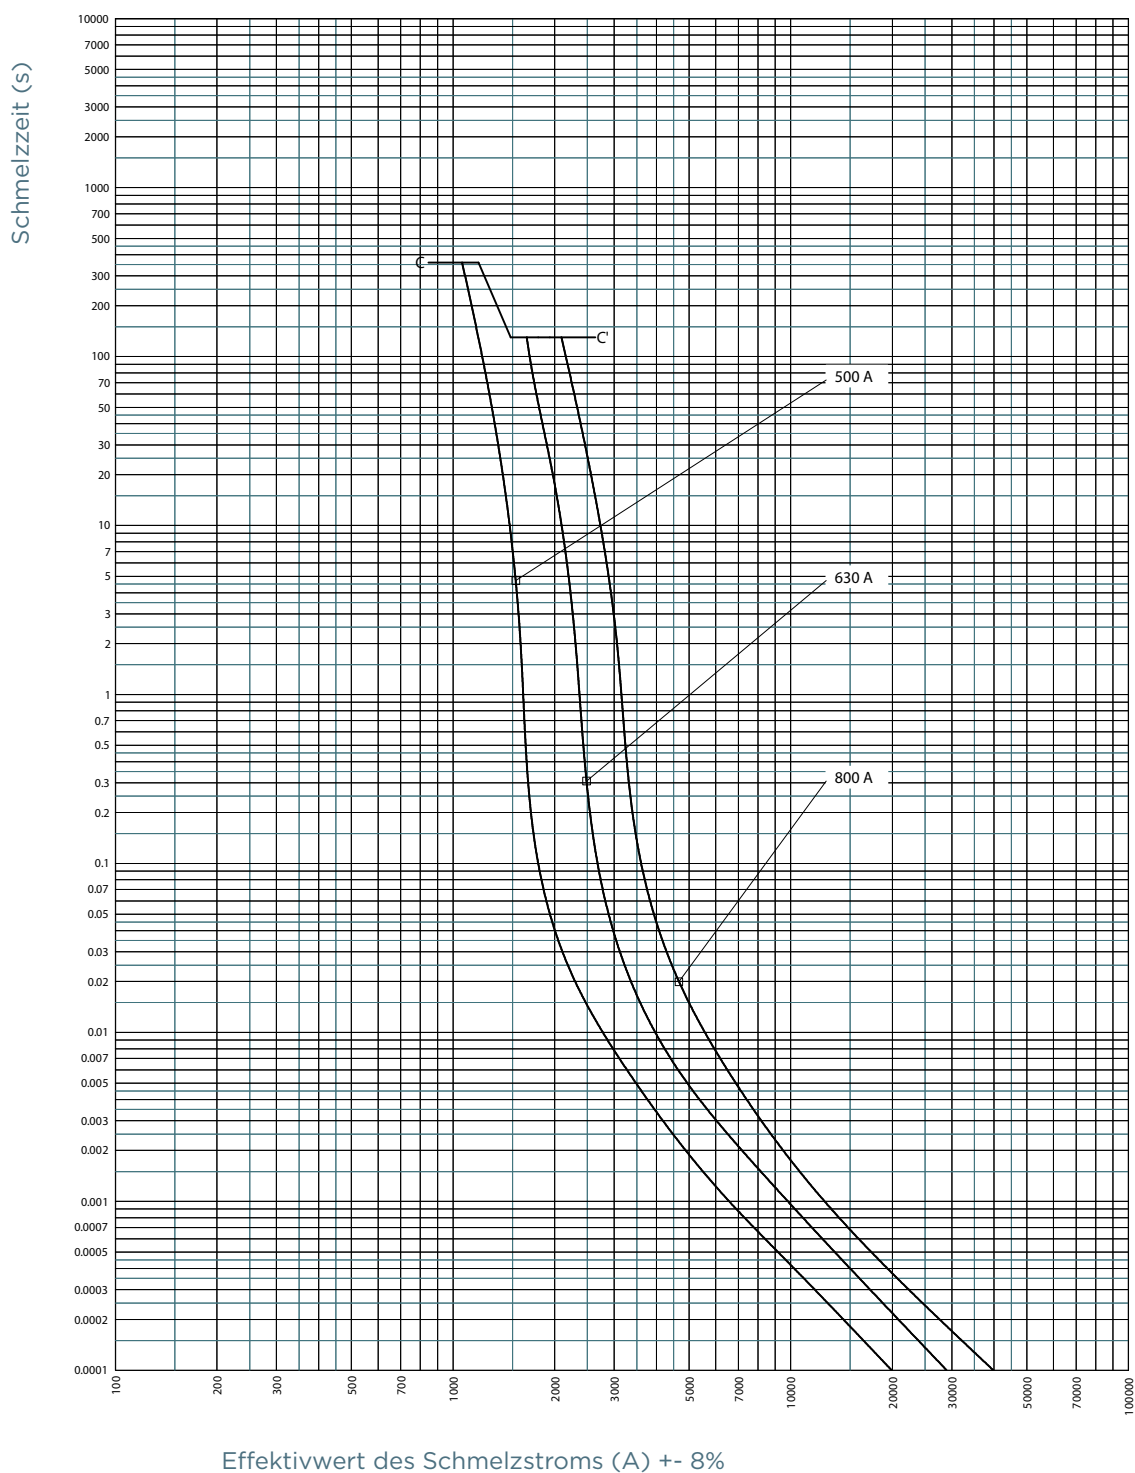


Mersen products have been designed by Mersen for a range of specific applications to be operated depending on particular specification and conditions. Mersen makes no representation or/and warranty, and waives any liability, either express or implied for products' reliability and life time or technical performance in case Mersen has not been provided with customer's specifications or if the products are not purchased directly from Mersen or its distributors and/or agents.


MAX. DC-BETRIEBSSPANNUNG = f(L/R)

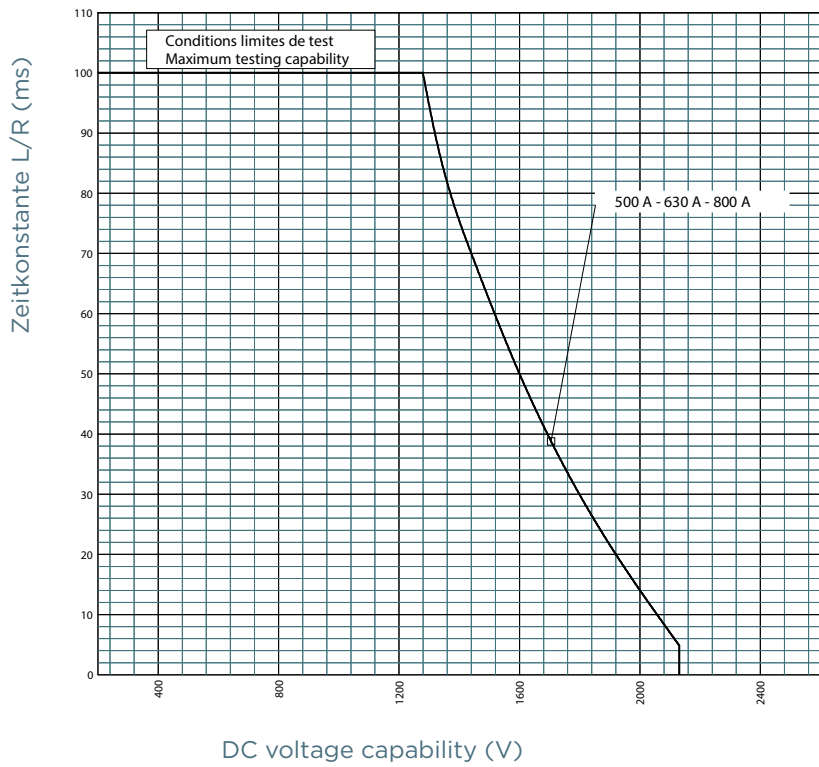

KORREKTURFAKTOR LEISTUNGSABGABE

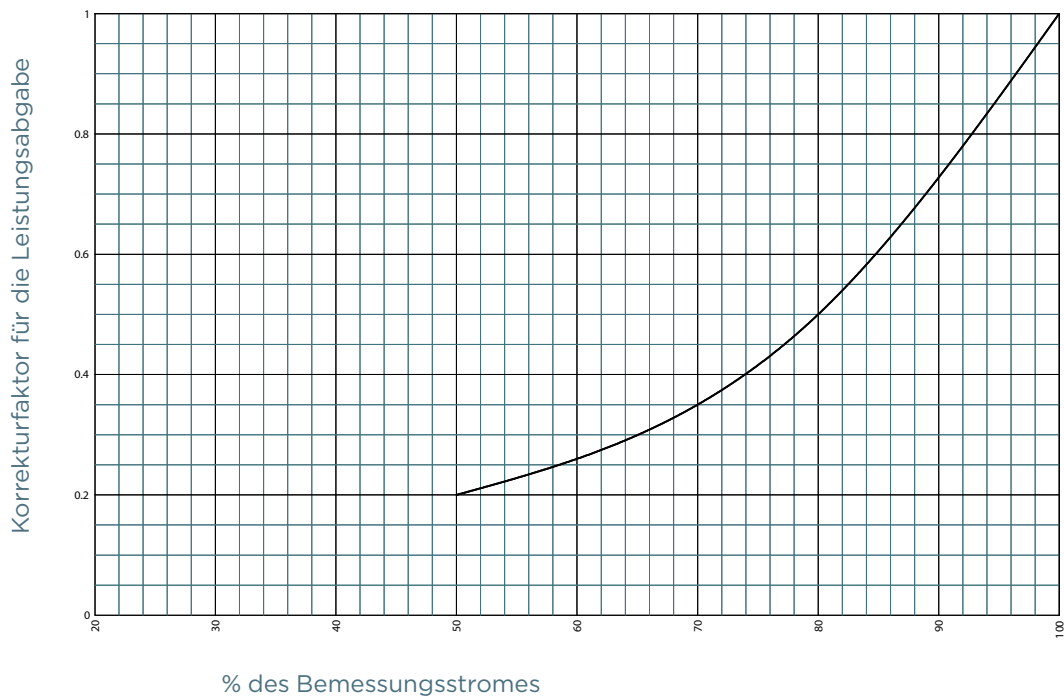

LICHTBOGENSPANNUNG

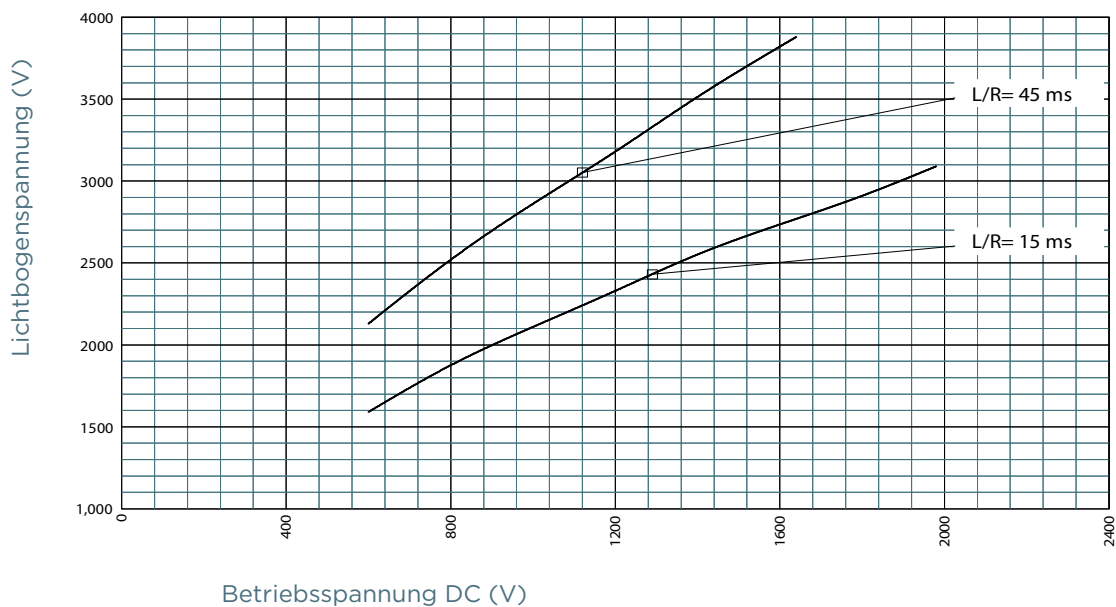


Mersen products have been designed by Mersen for a range of specific applications to be operated depending on particular specification and conditions. Mersen makes no representation or/and warranty, and waives any liability, either express or implied for products' reliability and life time or technical performance in case Mersen has not been provided with customer's specifications or if the products are not purchased directly from Mersen or its distributors and/or agents.

Protistor® size 2x122 aR

2000VDC

ABMESSUNGEN

Size 2x122aR 2000VDC

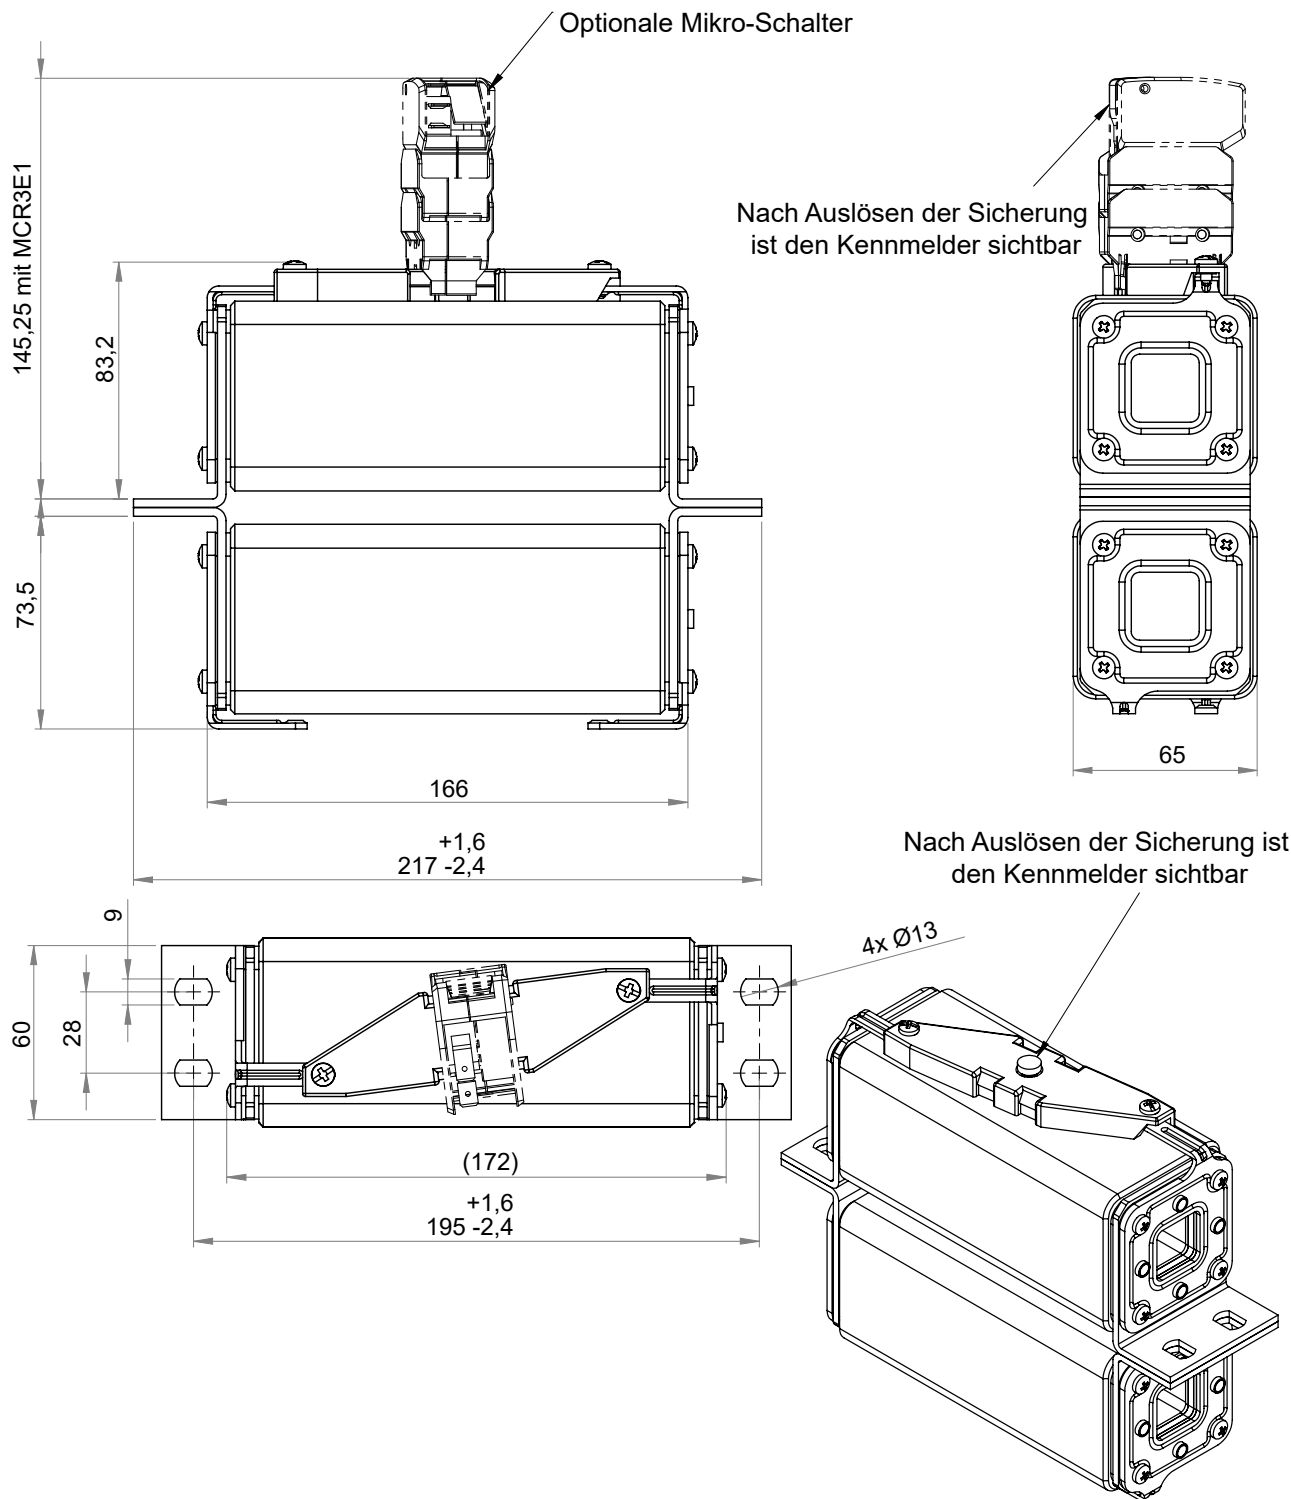

Abmessungen in mm