
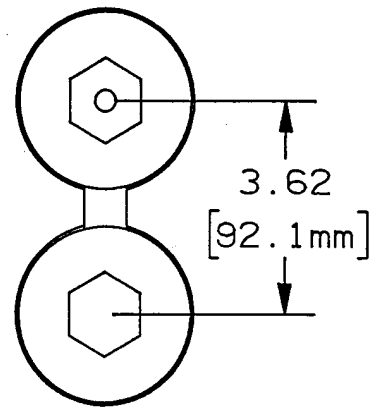


24396

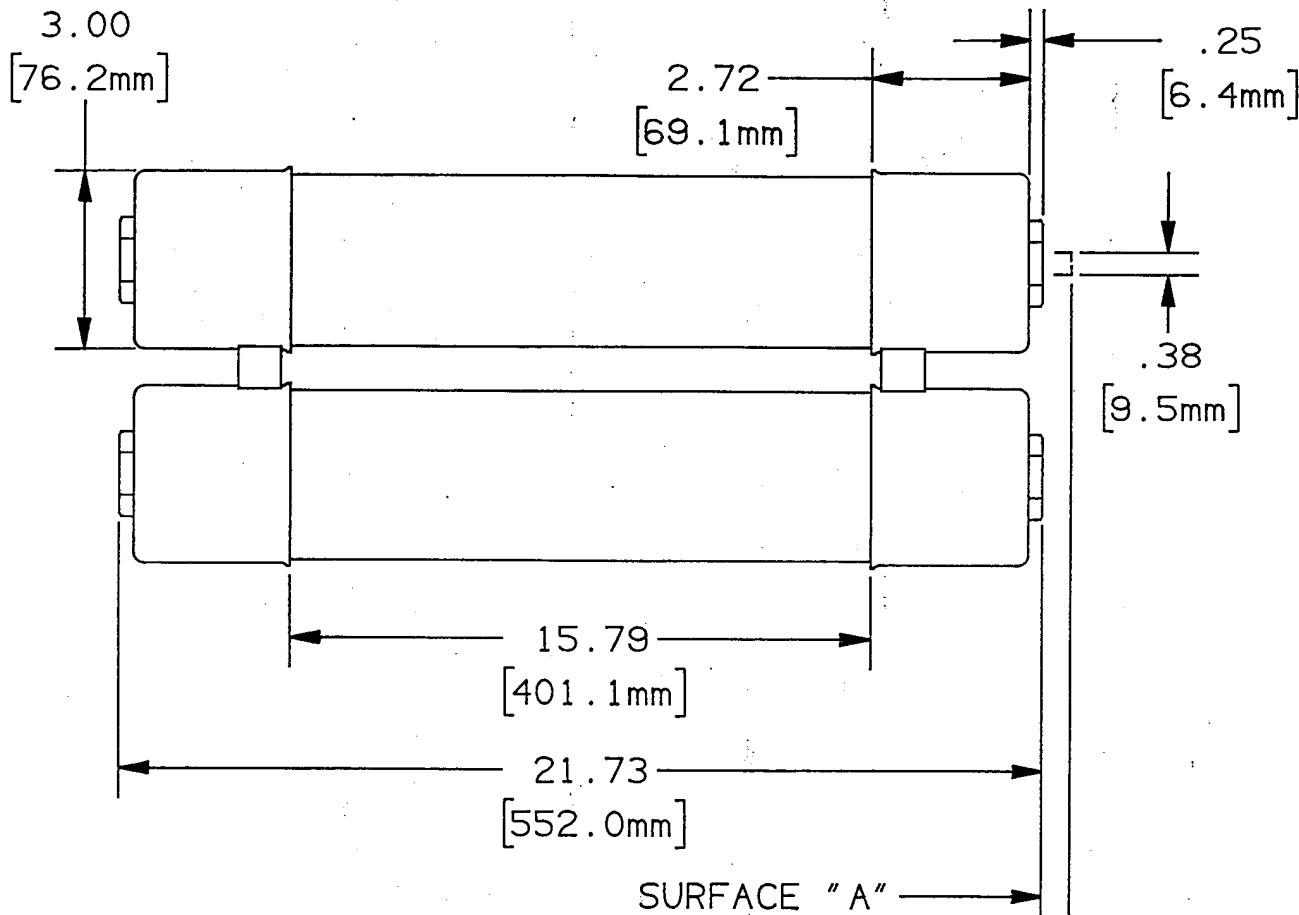

INDICATOR FLUSH WITH SURFACE "A" BEFORE FUSE OPENS.
 INDICATOR EXTENDS .50 (12.7mm) AFTER FUSE OPENS.
 INDICATOR EXERTS 2 LBS FORCE AT END OF TRAVEL

RATING	CATALOG NO.
125E	A155F2D0R0-125E
150E	A155F2D0R0-150E
175E	A155F2D0R0-175E
200E	A155F2D0R0-200E

GOULD 374 MERRIMAC STREET
 NEWBURYPORT, MA 01950

PRODUCT MANAGER SIGN: <i>H. Cline</i> DATE: 5/18/93	DESIGN ENGINEER SIGN: <i>A. O'Shields</i> DATE: 1/29/93
---	---

MEDIUM VOLTAGE AMP-TRAP
 E-RATED GENERAL PURPOSE
 CURRENT LIMITING FUSE
 CS-3 SERIES, 125E TO 200E, 15.5KV MAX

OUTLINE DIMENSIONS
 NOT TO BE USED FOR PRODUCTION
 24396