
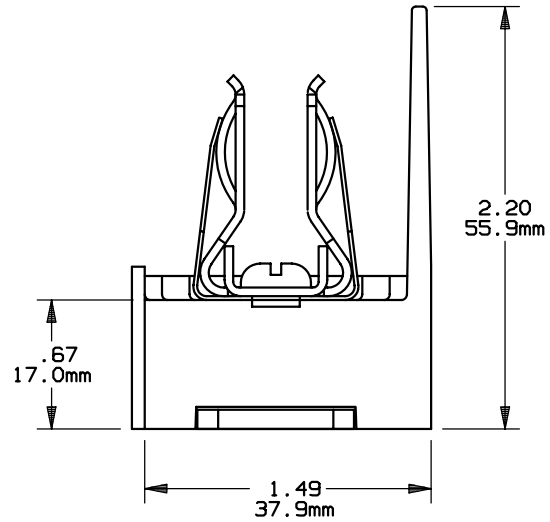
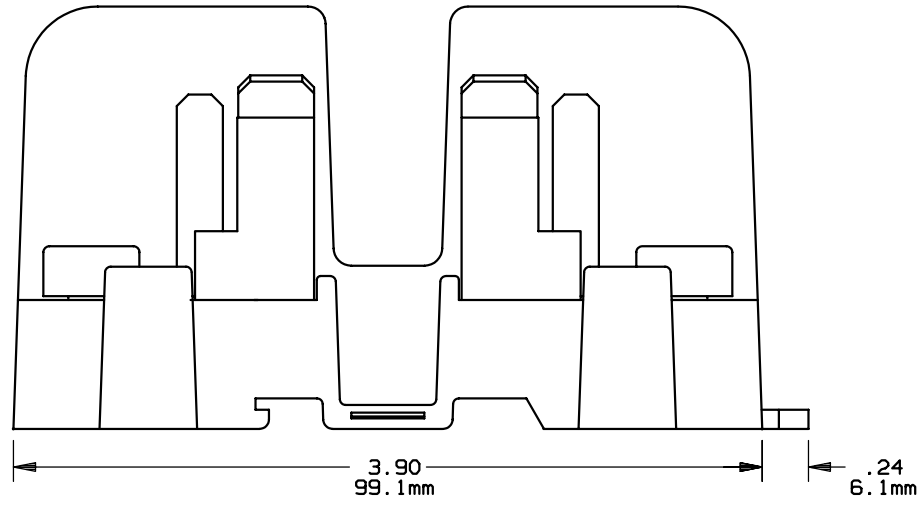


| REV | DATE | ECO | DESCRIPTION | BY | CK | APP |
|-----|---------|-----|---------------------------------------|-----|----|-----|
| A | 3-18-08 | NA | UPDATED OUTLINE FORMAT AND DIMENSIONS | LDB | NA | NA |

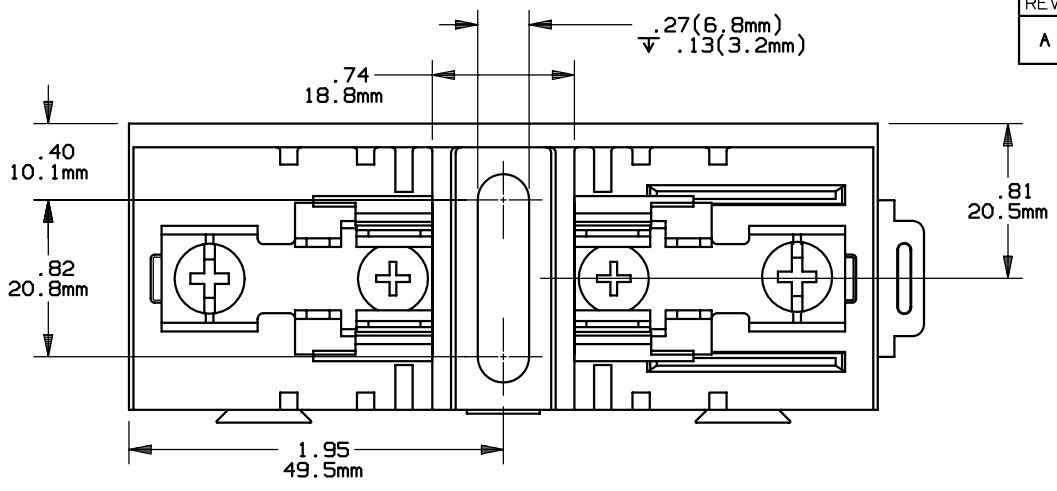

| P/N | CONN TYPE | RMS SYM RATING | TORQUE (IN-LBS) | WIRE | | U/L | | CSA |
|--------|-----------|----------------|-----------------|-------|---------|----------|-----------|------------|
| | | | | °C | TYPE | FILE NO. | GUIDE NO. | REPORT NO. |
| 60615T | SCREW | 200K | 20 | 60/75 | CU ONLY | E52283 | IZLT2 | LR32169 |

NOTES:
 1. TOLERANCES ±.015 UNLESS OTHERWISE SPECIFIED.
 2. MATERIAL COMPOSITION AND RATING THERMOPLASTIC-125°C RTI.

MERSEN
 MERSEN USA NEWBURYPORT-MA, LLC
 374 MERRIMAC STREET
 NEWBURYPORT, MA 01950

| | |
|-----------------|-----------------|
| PRODUCT MANAGER | DESIGN ENGINEER |
| SIGN: | SIGN: |
| DATE: | DATE: |

FUSE BLOCK, 600V-60A, ADDER CLASS T

OUTLINE DIMENSIONS NOT TO BE USED FOR PRODUCTION

700064