


**NOTES:**

- INDICATOR IS FLUSH WITH SURFACE **A** BEFORE FUSE OPENS  
 INDICATOR EXTENDS .44 IN. [11.2mm] AFTER FUSE OPENS AND EXERTS  
 AN 1 LBF AT THE END OF TRAVEL

REV.	DATE	ECO	DESCRIPTION	BY	CK	APP
-	12/13/2019	N/A	INITIAL RELEASE	RLM	N/A	N/A
B	1/29/2024	18032	UPDATED TITLE BLOCK, ADDED NOTES, DIM .44[11.2] WAS .50[12.7], 1 LBS FORCE WAS 2 LBS FORCE	YF	N/A	SEE ECO

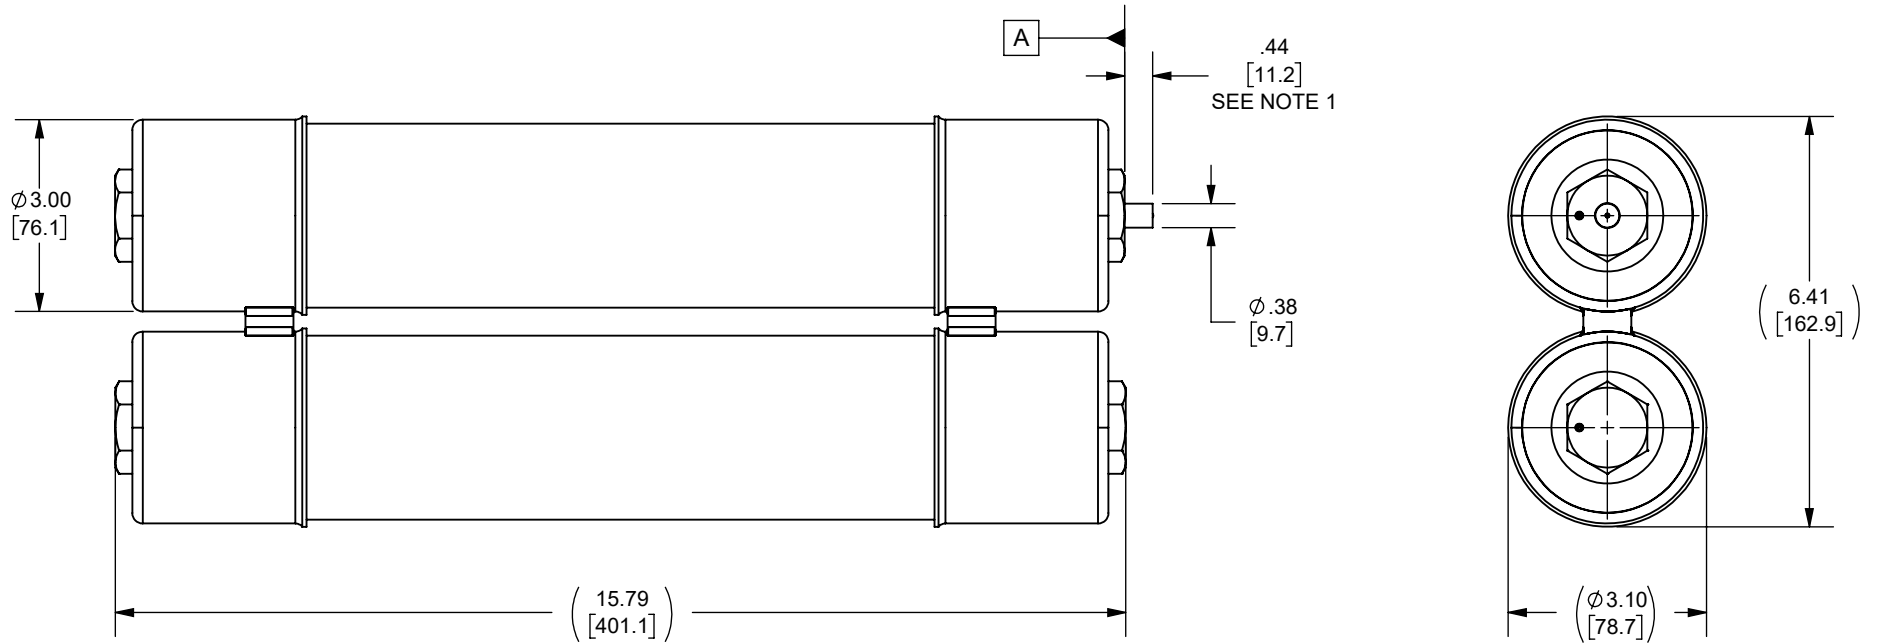

OUTLINE DIMENSIONS  
 NOT TO BE USED FOR PRODUCTION  
 DIMENSIONS IN [ ] ARE MILLIMETERS

<i>Approval stage / Etat d'approbation:</i> <b>APPROUVÉ POUR FABRICATION / APPROVED FOR MANUFACTURING</b>		Product Class: / Product Type: <b>MEDIUM VOLTAGE R-RATED</b>	
<i>Initial ECO / ECO intiale:</i> <b>ECO-18032-000</b>		Product amp rating: / Voltage rating: <b>18 - 24 R 7.2kV</b>	
<i>Draw by / Dessiné par:</i> <b>Yadyra Fang</b>		Title / Titre: <b>OUTLINE</b> <b>A072F2D0R0(18,24)R</b>	
Date: <b>6/14/2024</b>		Weight: / Masse:	
<i>Checked by / Vérifié par:</i> <b>Luis ARMENTA</b>		Drawing / de dessin: <b>702333</b>	
Date: <b>6/14/2024</b>		Rev: / Rév: <b>B</b>	
Electrical Power 374 MERRIMAC STREET NEWBURYPORT, MA 01950		Part / Article: <b>SEE TABLE</b>	
Éch / Scale: <b>1:3</b> Format / Size: <b>A</b>		Page: <b>1/1</b>	



A072F2D0R0-24R  
 A072F2D0R0-18R  
 CATALOG NUMBER

Ce plan strictement confidentiel est la propriété exclusive de la société MERSEN sans l'autorisation écrite de laquelle il ne peut être ni reproduit, ni copié, ni communiqué à des tiers.  
 This drawing and specifications there on is property of MERSEN and shall not be reproduced or copied or used in whole or in part as the base for manufacture or sale of item without written permission.